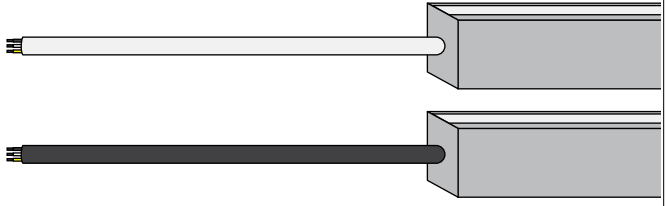



**Aion LED**  
**Low-Voltage Class 2/3 Power Cable**  
**Dynamic White System**

 UL Approved  
 UV Rated  
 Indoor/ Outdoor


**Fixture Power Lead**

FIXTURE POWER LEAD	WHITE JACKET	BLACK JACKET	
12" power lead	<b>CT-A12</b>	<b>CTB-A12</b>	
24" power lead	<b>CT-A24</b>	<b>CTB-A24</b>	
48" power lead	<b>CT-A48</b>	<b>CTB-A48</b>	


**Hard Wire Jumper- Recommended with WR Type & LE Applications Only**

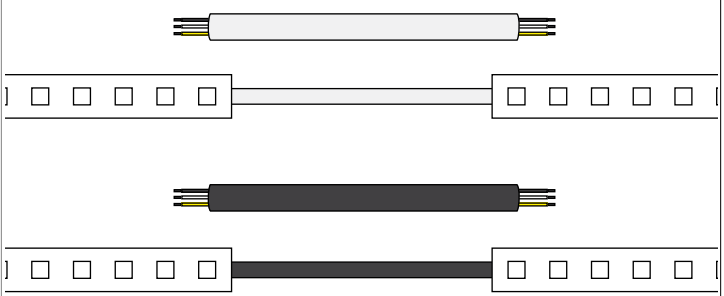HARD WIRED JUMPER	WHITE JACKET	BLACK JACKET	
4" Hard Wired Jumper	<b>CT-C4</b>	<b>CTB-C4</b>	
12" Hard Wired Jumper	<b>CT-C12</b>	<b>CTB-C12</b>	
24" Hard Wired Jumper	<b>CT-C24</b>	<b>CTB-C24</b>	

**3 Pin Plugs- Recommended with all AT Series Housings & Fixtures**

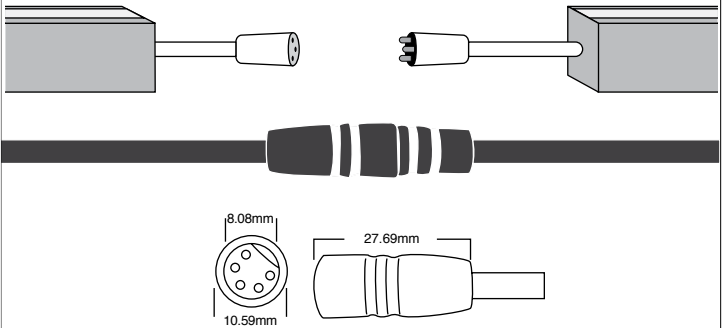3 PIN JUMPER w/ disconnect	WHITE JACKET	BLACK JACKET	
4" Jumper with Disconnect	<b>CT-BP4</b>	<b>CT-BPB4</b>	
12" Jumper with Disconnect	<b>CT-BP12</b>	<b>CT-BPB12</b>	
24" Jumper with Disconnect	<b>CT-BP24</b>	<b>CT-BPB24</b>	
48" Jumper with Disconnect	<b>CT-BP48</b>	<b>CT-BPB48</b>	

**Patch Cord- Optional, to Extend Length**

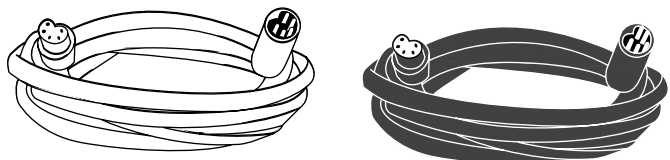
PATCH CORD	WHITE JACKET	BLACK JACKET	
24" M to F Extension Cord	<b>BP-5FM24</b>	<b>BPB-5FM24</b>	
48" M to F Extension Cord	<b>BP-5FM48</b>	<b>BPB-5FM48</b>	
96" M to F Extension Cord	<b>BP-5FM96</b>	<b>BPB-5FM96</b>	

 Black standard for dark bronze housings  
 White standard for silver housings



Component of a complete system including: Aion LED A-Track Light Engine, Aion LED A-Track housing with diffuser lens, & Aion LED driver (power supply). Dimmer not included. Approved dimmers, controls, power supplies, cable, & other components only. Contact Aion LED for questions regarding compatibility. Electrician installed. Strictly adhere to NEC & local building code. Limited 5-year warranty against manufacturing defects only, does not cover labor; voided by: inadequate ventilation, field modifications, installation by unqualified personnel, unapproved controls, drivers, cabling, other devices, not following installation guidelines & protocol, general negligence. Installer assumes all liability with regard to property & safety. This product is UL listed. See separate "Aion LED Warranty Terms" & additional instructional materials for more information. Authorized installers only. Systems tested prior to shipping.

Unless Otherwise Noted, Leads are 24" and Plugs are 4". Other Lengths Available

**CONFIGURATION 1**  
Power Lead to Fixture  
*Default, Unless Otherwise Noted*




**CONFIGURATION 2**  
Power Lead to Fixture with End Lead




**CONFIGURATION 3**  
Power Lead to Fixture with End Plug



**CONFIGURATION 4**  
Power Plug to Fixture with End Plug



**CONFIGURATION 5**  
Power Plug to Fixture



**CONFIGURATION 6**  
**Not Compatible with Track**  
Power Lead to Fixture with Jumper to Next Fixture



**CONFIGURATION 7**  
**Not Compatible with Track**  
Jumper to Fixture with Jumper to Next Fixture



**CONFIGURATION 8**  
**Not Compatible with Track**  
Jumper to Fixture



**A-TRACK FIXTURES**

Pre-assembled: ≤ 8 ft (96 in)

Assembly Required: > 8 ft (96 in)



Component of a complete system including: Aion LED A-Track Light Engine, Aion LED A-Track housing with diffuser lens, & Aion LED driver (power supply). Dimmer not included. Approved dimmers, controls, power supplies, cable, & other components only. Contact Aion LED for questions regarding compatibility. Electrician installed. Strictly adhere to NEC & local building code. Limited 5-year warranty against manufacturing defects only, does not cover labor; voided by: inadequate ventilation, field modifications, installation by unqualified personnel, unapproved controls, drivers, cabling, other devices, not following installation guidelines & protocol, general negligence. Installer assumes all liability with regard to property & safety. This product is UL listed. See separate "Aion LED Warranty Terms" & additional instructional materials for more information. Authorized installers only. Systems tested prior to shipping.