

PRELIMINARY SPECIFICATION, SUBJECT TO CHANGE WITHOUT NOTICE

SKYTRACK
Linear Pendant System



Custom Lengths

Pre-assembled: ≤ 8 ft (96 in) per section

End to End Connectability

Made in the USA

Spec Package Includes:

- Sky Track Data Sheet
- Sky Track Diagram Sheet

Sky Track Order Sheets For:

- Static White/ Color Fixture
- Dynamic White Fixture
- Dynamic Color Fixture

See separate installation instructions

Patent Pending

SKY TRACK REQUIRES

- Aion LED Light Engine
- Aion LED Driver
- Sold Separately, Not Included



PRELIMINARY SPECIFICATION, SUBJECT TO CHANGE WITHOUT NOTICE

Component of a complete system including: Aion LED A-Track Light Engine, Aion LED A-Track housing with diffuser lens, & Aion LED driver (power supply). Dimmer not included. Approved dimmers, controls, power supplies, cable, & other components only. Contact Aion LED for questions regarding compatibility. Electrician installed. Strictly adhere to NEC & local building code. Limited 5-year warranty against manufacturing defects only, does not cover labor; voided by: inadequate ventilation, field modifications, installation by unqualified personnel, unapproved controls, drivers, cabling, other devices, not following installation guidelines & protocol, general negligence. Installer assumes all liability with regard to property & safety. This product is UL listed. See separate "Aion LED Warranty Terms" & additional instructional materials for more information. Authorized installers only. Systems tested prior to shipping.

PRELIMINARY SPECIFICATION, SUBJECT TO CHANGE WITHOUT NOTICE

SKYTRACK
Linear Pendant System



Options

ST-Series Sky Track fixtures are semi custom and made to order.

Lens

- Frosted
- Clear
- Prismatic

Finish

- White Powder Coat
- Black Powder Coat
- Custom Color

Length

Standard Length:
8' on Center, Including
Mounting Brackets*

Custom pre-cut
lengths available

Leads


- 96" Black or White Cable
- Custom Lengths Available

Fixture Suspension Kit

- Sky Track Suspension 8'
- 1/32" Diameter Aircraft
Cable Grippers
- Optional Canopies

Corner

12" x 12"



8' on center suspension points. 8' 0.875" overall fixture length including mounting brackets and end caps




PRELIMINARY SPECIFICATION, SUBJECT TO CHANGE WITHOUT NOTICE

Component of a complete system including: Aion LED A-Track Light Engine, Aion LED A-Track housing with diffuser lens, & Aion LED driver (power supply). Dimmer not included. Approved dimmers, controls, power supplies, cable, & other components only. Contact Aion LED for questions regarding compatibility. Electrician installed. Strictly adhere to NEC & local building code. Limited 5-year warranty against manufacturing defects only, does not cover labor; voided by: inadequate ventilation, field modifications, installation by unqualified personnel, unapproved controls, drivers, cabling, other devices, not following installation guidelines & protocol, general negligence. Installer assumes all liability with regard to property & safety. This product is UL listed. See separate "Aion LED Warranty Terms" & additional instructional materials for more information. Authorized installers only. Systems tested prior to shipping.

PRELIMINARY SPECIFICATION, SUBJECT TO CHANGE WITHOUT NOTICE

SKYTRACK
Linear Pendant System

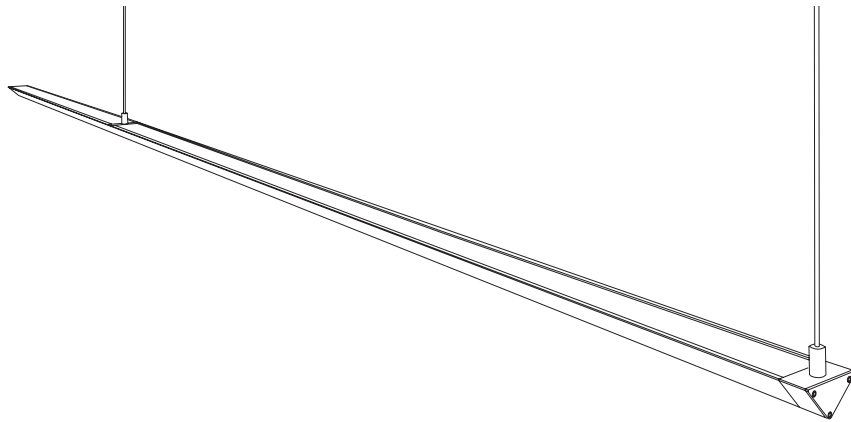

NOT TO SCALE

Compatibility*

ZERO DIM™

- 8924-LE
- 4924-LE
- 3924-LE
- 9900-FR
- 9800-FC

DIM TO GLOW™

- 8924-CT3022-LE

RGBW+ Color Tuning


- 8924-RGBW-LE

*See order forms for complete system options


Standard 8' on center

Custom lengths & configurations require reflected ceiling plan with suspension points indicated

Dimensions

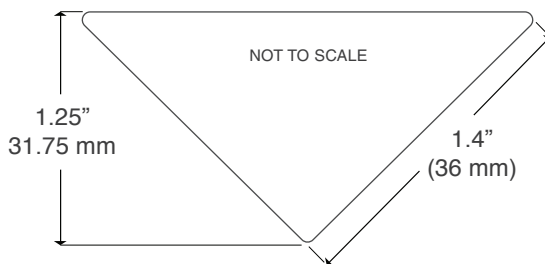

8' on Center Suspension
8' 0.875" overall fixture length including mounting brackets and end caps

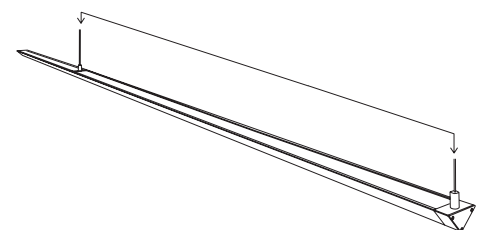

PRELIMINARY SPECIFICATION, SUBJECT TO CHANGE WITHOUT NOTICE


Component of a complete system including: Aion LED A-Track Light Engine, Aion LED A-Track housing with diffuser lens, & Aion LED driver (power supply). Dimmer not included. Approved dimmers, controls, power supplies, cable, & other components only. Contact Aion LED for questions regarding compatibility. Electrician installed. Strictly adhere to NEC & local building code. Limited 5-year warranty against manufacturing defects only, does not cover labor; voided by: inadequate ventilation, field modifications, installation by unqualified personnel, unapproved controls, drivers, cabling, other devices, not following installation guidelines & protocol, general negligence. Installer assumes all liability with regard to property & safety. This product is UL listed. See separate "Aion LED Warranty Terms" & additional instructional materials for more information. Authorized installers only. Systems tested prior to shipping.

PRELIMINARY SPECIFICATION, SUBJECT TO CHANGE WITHOUT NOTICE

SKYTRACK
Linear Pendant System



Please include reflected ceiling plan.
Note suspension point distances, power feed locations* and total overall lengths of fixtures.

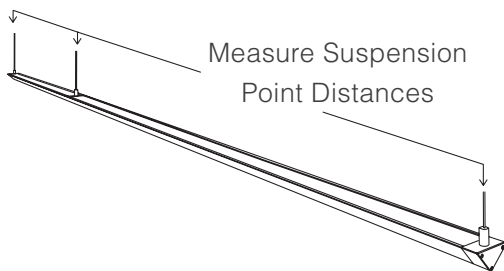

Power Feed Requirements










9924-FR	1 per 8' max
8924-LE	1 per 16' max
4924-LE	1 per 32' max

PRELIMINARY SPECIFICATION, SUBJECT TO CHANGE WITHOUT NOTICE

Component of a complete system including: Aion LED A-Track Light Engine, Aion LED A-Track housing with diffuser lens, & Aion LED driver (power supply). Dimmer not included. Approved dimmers, controls, power supplies, cable, & other components only. Contact Aion LED for questions regarding compatibility. Electrician installed. Strictly adhere to NEC & local building code. Limited 5-year warranty against manufacturing defects only, does not cover labor; voided by: inadequate ventilation, field modifications, installation by unqualified personnel, unapproved controls, drivers, cabling, other devices, not following installation guidelines & protocol, general negligence. Installer assumes all liability with regard to property & safety. This product is UL listed. See separate "Aion LED Warranty Terms" & additional instructional materials for more information. Authorized installers only. Systems tested prior to shipping.



NAME	TYPE	SPECIFIER
------	------	-----------

HOUSING	 ST850	 LENS	 FINISH	<h3 style="margin-top: 0;">Required Fixture Lengths</h3> <p>Please input fixture lengths/ quantity & configuration types</p> <table border="1" style="width:100%; border-collapse: collapse; margin-top: 10px;"> <thead> <tr> <th style="width:15%;">ZONE</th> <th style="width:15%;">FIXTURE LENGTH</th> <th style="width:15%;">SUSPENSION DISTANCE</th> <th style="width:15%;">QUANTITY</th> </tr> </thead> <tbody> <tr><td> </td><td> </td><td> </td><td> </td></tr> <tr><td> </td><td> </td><td> </td><td> </td></tr> <tr><td> </td><td> </td><td> </td><td> </td></tr> <tr><td> </td><td> </td><td> </td><td> </td></tr> <tr><td> </td><td> </td><td> </td><td> </td></tr> <tr><td> </td><td> </td><td> </td><td> </td></tr> <tr><td> </td><td> </td><td> </td><td> </td></tr> <tr><td> </td><td> </td><td> </td><td> </td></tr> <tr><td> </td><td> </td><td> </td><td> </td></tr> </tbody> </table>	ZONE	FIXTURE LENGTH	SUSPENSION DISTANCE	QUANTITY																																							
	ZONE	FIXTURE LENGTH	SUSPENSION DISTANCE		QUANTITY																																										
<input type="checkbox"/> F Frosted <input type="checkbox"/> C Clear <input type="checkbox"/> P Prismatic	<input type="checkbox"/> B L K Black <input type="checkbox"/> W H T White																																														
 ST850-C CORNER	 LENS	 FINISH																																													
<input type="checkbox"/> F Frosted <input type="checkbox"/> C Clear <input type="checkbox"/> P Prismatic	<input type="checkbox"/> B L K Black <input type="checkbox"/> W H T White																																														
LIGHT ENGINE	 LIGHT ENGINE	 COLOR CODE	 MODEL TYPE																																												
	<table style="width:100%; border-collapse: collapse;"> <tr> <td style="border: 1px solid black; padding: 2px;">9 5</td><td style="padding: 2px;">9524</td> <td style="border: 1px solid black; padding: 2px;">8 9</td><td style="padding: 2px;">8924</td> </tr> <tr> <td style="border: 1px solid black; padding: 2px;">6 5</td><td style="padding: 2px;">6524</td> <td style="border: 1px solid black; padding: 2px;">4 9</td><td style="padding: 2px;">4924</td> </tr> <tr> <td style="border: 1px solid black; padding: 2px;">3 9</td><td style="padding: 2px;">3924</td> <td colspan="2"> </td> </tr> </table>	9 5	9524	8 9	8924	6 5	6524	4 9	4924	3 9	3924			<table style="width:100%; border-collapse: collapse;"> <tr> <td style="border: 1px solid black; padding: 2px;">2 2</td><td style="padding: 2px;">2150K</td> <td style="border: 1px solid black; padding: 2px;"><input type="checkbox"/> A</td><td style="padding: 2px;">Amber</td> </tr> <tr> <td style="border: 1px solid black; padding: 2px;">2 4</td><td style="padding: 2px;">2350K</td> <td style="border: 1px solid black; padding: 2px;"><input type="checkbox"/> B</td><td style="padding: 2px;">Blue</td> </tr> <tr> <td style="border: 1px solid black; padding: 2px;">2 6</td><td style="padding: 2px;">2550K*</td> <td style="border: 1px solid black; padding: 2px;"><input type="checkbox"/> R</td><td style="padding: 2px;">Red</td> </tr> <tr> <td style="border: 1px solid black; padding: 2px;">2 7</td><td style="padding: 2px;">2650K</td> <td style="border: 1px solid black; padding: 2px;"><input type="checkbox"/> G</td><td style="padding: 2px;">Green</td> </tr> <tr> <td style="border: 1px solid black; padding: 2px;">3 0</td><td style="padding: 2px;">2950K</td> <td colspan="2"> </td> </tr> <tr> <td style="border: 1px solid black; padding: 2px;">5 5</td><td style="padding: 2px;">3450K</td> <td colspan="2" style="font-size: 8px;">*2550K ONLY AVAILABLE 3000, 4000 & 8000 SERIES LE</td> </tr> <tr> <td style="border: 1px solid black; padding: 2px;">4 0</td><td style="padding: 2px;">3950K</td> <td colspan="2" style="font-size: 8px;">†5500K ONLY AVAILABLE 9000-FR</td> </tr> <tr> <td colspan="4" style="padding: 2px;">5500K†</td> </tr> </table>	2 2	2150K	<input type="checkbox"/> A	Amber	2 4	2350K	<input type="checkbox"/> B	Blue	2 6	2550K*	<input type="checkbox"/> R	Red	2 7	2650K	<input type="checkbox"/> G	Green	3 0	2950K			5 5	3450K	*2550K ONLY AVAILABLE 3000, 4000 & 8000 SERIES LE		4 0	3950K	†5500K ONLY AVAILABLE 9000-FR		5500K†				<input type="checkbox"/> L E Light Engine <input type="checkbox"/> F R Frangible Rigid
	9 5	9524	8 9	8924																																											
	6 5	6524	4 9	4924																																											
3 9	3924																																														
2 2	2150K	<input type="checkbox"/> A	Amber																																												
2 4	2350K	<input type="checkbox"/> B	Blue																																												
2 6	2550K*	<input type="checkbox"/> R	Red																																												
2 7	2650K	<input type="checkbox"/> G	Green																																												
3 0	2950K																																														
5 5	3450K	*2550K ONLY AVAILABLE 3000, 4000 & 8000 SERIES LE																																													
4 0	3950K	†5500K ONLY AVAILABLE 9000-FR																																													
5500K†																																															
LEADS	POWER LEADS	TOTAL SUSPENSION POINTS																																													
	<input type="checkbox"/> A C <input type="checkbox"/> A 9 6 White 96" <input type="checkbox"/> A C B <input type="checkbox"/> A 9 6 Black 96" <input type="checkbox"/> A C <input type="checkbox"/> A Custom	<input type="checkbox"/> S K <input type="checkbox"/> 2 2 <input type="checkbox"/> S K <input type="checkbox"/> 3 3 <input type="checkbox"/> S K <input type="checkbox"/> 4 4																																													
	DC MLV DIMMING	Z 0-10V DIMMING	X DMX, 1 CHANNEL																																												
<input type="checkbox"/> D50-DC <input type="checkbox"/> 120 VAC <input type="checkbox"/> D100-DC <input type="checkbox"/> 240 VAC <input type="checkbox"/> D300-DC3 <input type="checkbox"/> 277 VAC	<input type="checkbox"/> D100-Z2 <input type="checkbox"/> D100-Z	<input type="checkbox"/> D100-X1 DMX CONTROLLER <input type="checkbox"/> AX5-1 <input type="checkbox"/> DTM																																													
DRIVER	M NON DIMMING	A LUTRON																																													
	<input type="checkbox"/> D12-M <input type="checkbox"/> D20-M <input type="checkbox"/> D40-M <input type="checkbox"/> D100-M	<input type="checkbox"/> D40-A Hi-lume 1% 2-wire UL-Recognized Constant Voltage, 40W <input type="checkbox"/> D40-A-R Hi-lume 1% 2-wire UL-Listed Constant Voltage, 40W <input type="checkbox"/> D40-A-L3D Hi-lume 1% EcoSystem/3-Wire UL-Recognized Constant Voltage <input type="checkbox"/> D40-A-L3D-R Hi-lume 1% EcoSystem/3-Wire UL-Listed Constant Voltage, 40W <input type="checkbox"/> D100-A Hi-lume Premier 0.1% UL-Listed Constant Voltage, 96W																																													

Notes

Refer to Light Engine Data Sheets for Light Engine Increments.
 Track is cut to exact length (1/8" tolerance)
 Allow tolerance for wiring/ plugs
 Fixtures up to Class 2 max. length

Custom Lengths

Pre-assembled: ≤ 8 ft (96 in) per section

SIGNATURE (Required if Final Lengths)







Final Order Lengths*

Budgetary only, requires field verification

Component of a complete system including: Aion LED A-Track Light Engine, Aion LED A-Track housing with diffuser lens, & Aion LED driver (power supply). Dimmer not included. Approved dimmers, controls, power supplies, cable, & other components only. Contact Aion LED for questions regarding compatibility. Electrician installed. Strictly adhere to NEC & local building code. Limited 5-year warranty against manufacturing defects only, does not cover labor; voided by inadequate ventilation, field modifications, installation by unqualified personnel, unapproved controls, drivers, cabling, other devices, not following installation guidelines & protocol, general negligence. Installer assumes all liability with regard to property & safety. This product is UL listed. See separate "Aion LED Warranty Terms" & additional instructional materials for more information. Authorized installers only. Systems tested prior to shipping.



NAME	TYPE	SPECIFIER
------	------	-----------

HOUSING	 ST850	 LENS	 FINISH	<h3>Required Fixture Lengths</h3> <p>Please input fixture lengths/ quantity & configuration types</p> <table border="1"> <thead> <tr> <th>ZONE</th> <th>FIXTURE LENGTH</th> <th>SUSPENSION DISTANCE</th> <th>QUANTITY</th> </tr> </thead> <tbody> <tr><td> </td><td> </td><td> </td><td> </td></tr> <tr><td> </td><td> </td><td> </td><td> </td></tr> <tr><td> </td><td> </td><td> </td><td> </td></tr> <tr><td> </td><td> </td><td> </td><td> </td></tr> <tr><td> </td><td> </td><td> </td><td> </td></tr> <tr><td> </td><td> </td><td> </td><td> </td></tr> <tr><td> </td><td> </td><td> </td><td> </td></tr> <tr><td> </td><td> </td><td> </td><td> </td></tr> <tr><td> </td><td> </td><td> </td><td> </td></tr> </tbody> </table>	ZONE	FIXTURE LENGTH	SUSPENSION DISTANCE	QUANTITY																																				
	ZONE	FIXTURE LENGTH	SUSPENSION DISTANCE		QUANTITY																																							
	<input type="checkbox"/> Frosted <input type="checkbox"/> Clear <input type="checkbox"/> Prismatic	<input type="checkbox"/> Black <input type="checkbox"/> White																																										
HOUSING	 ST850-C CORNER	 LENS	 FINISH																																									
		<input type="checkbox"/> Frosted <input type="checkbox"/> Clear <input type="checkbox"/> Prismatic	<input type="checkbox"/> Black <input type="checkbox"/> White																																									
DIM TO GLOW™ LIGHT ENGINE	8924	CT3022	LE																																									
	POWER LEADS	TOTAL SUSPENSION POINTS																																										
LEADS	<input type="checkbox"/> CT-A96 White 96" <input type="checkbox"/> CTB-A96 Black 96" <input type="checkbox"/> CT-A Custom	<input type="checkbox"/> SK-2 2 <input type="checkbox"/> SK-3 3 <input type="checkbox"/> SK-4 4																																										
	X DMX, 2 CHANNEL	AX5 DMX CONTROLLER	DTM Modile & iOS App																																									
DRIVER	<input type="checkbox"/> D100-X2	<input type="checkbox"/> AX5-2 <input type="checkbox"/> D12-M	<input type="checkbox"/> DTM																																									
	<p>Notes</p> <p>Refer to Light Engine Data Sheets for Light Engine Increments. Track is cut to exact length (1/8" tolerance) Allow tolerance for wiring/ plugs Fixtures up to Class 2 max. length</p> <p>Custom Lengths</p> <p>Pre-assembled: ≤ 8 ft (96 in) per section</p>																																											
<p>SIGNATURE (Required if Final Lengths)</p> <input type="checkbox"/> Final Order Lengths* <input type="checkbox"/> Budgetary only, requires field verification																																												

Component of a complete system including: Aion LED A-Track Light Engine, Aion LED A-Track housing with diffuser lens, & Aion LED driver (power supply). Dimmer not included. Approved dimmers, controls, power supplies, cable, & other components only. Contact Aion LED for questions regarding compatibility. Electrician installed. Strictly adhere to NEC & local building code. Limited 5-year warranty against manufacturing defects only, does not cover labor; voided by: inadequate ventilation, field modifications, installation by unqualified personnel, unapproved controls, drivers, cabling, other devices, not following installation guidelines & protocol, general negligence. Installer assumes all liability with regard to property & safety. This product is UL listed. See separate "Aion LED Warranty Terms" & additional instructional materials for more information. Authorized installers only. Systems tested prior to shipping.

NAME		TYPE		SPECIFIER																																								
HOUSING	ST850	 LENS	 FINISH	<h3>Required Fixture Lengths</h3> <p>Please input fixture lengths/ quantity & configuration types</p> <table border="1"> <thead> <tr> <th>ZONE</th> <th>FIXTURE LENGTH</th> <th>SUSPENSION DISTANCE</th> <th>QUANTITY</th> </tr> </thead> <tbody> <tr><td> </td><td> </td><td> </td><td> </td></tr> <tr><td> </td><td> </td><td> </td><td> </td></tr> <tr><td> </td><td> </td><td> </td><td> </td></tr> <tr><td> </td><td> </td><td> </td><td> </td></tr> <tr><td> </td><td> </td><td> </td><td> </td></tr> <tr><td> </td><td> </td><td> </td><td> </td></tr> <tr><td> </td><td> </td><td> </td><td> </td></tr> <tr><td> </td><td> </td><td> </td><td> </td></tr> <tr><td> </td><td> </td><td> </td><td> </td></tr> </tbody> </table>	ZONE	FIXTURE LENGTH	SUSPENSION DISTANCE	QUANTITY																																				
	ZONE	FIXTURE LENGTH	SUSPENSION DISTANCE		QUANTITY																																							
	<input type="checkbox"/> Frosted <input type="checkbox"/> Clear <input type="checkbox"/> Prismatic	<input type="checkbox"/> Black <input type="checkbox"/> White																																										
	ST850-C CORNER	 LENS	 FINISH																																									
		<input type="checkbox"/> Frosted <input type="checkbox"/> Clear <input type="checkbox"/> Prismatic	<input type="checkbox"/> Black <input type="checkbox"/> White																																									
LIGHT ENGINE	8924	RGBW	LE																																									
	POWER LEADS	TOTAL SUSPENSION POINTS																																										
LEADS	<input type="checkbox"/> RGBW-A 96 White 96"	<input type="checkbox"/> SK-2 2																																										
	<input type="checkbox"/> RGBWB-A 96 Black 96"	<input type="checkbox"/> SK-3 3																																										
	<input type="checkbox"/> RGBW-A Custom	<input type="checkbox"/> SK-4 4																																										
DRIVER	X DMX, 4 CHANNEL	AX5 DMX CONTROLLER	DTM Module & iOS App																																									
	<input type="checkbox"/> D100-X4	<input type="checkbox"/> AX5-4 <input type="checkbox"/> D12-M	<input type="checkbox"/> DTM																																									

Notes
 Refer to Light Engine Data Sheets for Light Engine Increments.
 Track is cut to exact length (1/8" tolerance)
 Allow tolerance for wiring/ plugs
 Fixtures up to Class 2 max. length

Custom Lengths
 Pre-assembled: ≤ 8 ft (96 in) per section

SIGNATURE (Required if Final Lengths)

Final Order Lengths*

Budgetary only, requires field verification

Component of a complete system including: Aion LED A-Track Light Engine, Aion LED A-Track housing with diffuser lens, & Aion LED driver (power supply). Dimmer not included. Approved dimmers, controls, power supplies, cable, & other components only. Contact Aion LED for questions regarding compatibility. Electrician installed. Strictly adhere to NEC & local building code. Limited 5-year warranty against manufacturing defects only, does not cover labor; voided by: inadequate ventilation, field modifications, installation by unqualified personnel, unapproved controls, drivers, cabling, other devices, not following installation guidelines & protocol, general negligence. Installer assumes all liability with regard to property & safety. This product is UL listed. See separate "Aion LED Warranty Terms" & additional instructional materials for more information. Authorized installers only. Systems tested prior to shipping.