

## WR Type

IP67 Wet Rated Flexible Linear



### Custom Lengths

Preassembled up to  $\leq 32$  ft. (384 in)\*  
Regulated by class 2 circuit limitations  
Refer to driver data sheet for max lengths

### IP67

Wet Location

### Made in the USA

Fabricated with high quality material

\*Up to Class 2 Max

### Includes

#WR-MK Mounting Clips & Screws

### Compatible With

#WR-MT Mounting Tape (Indoor, Sealed Surfaces)

-or-

Clear Silicone (Outdoor, Porous Surfaces)

## Select Output & Color Temperature

## Determine required lengths

Tested as suitable for use within  
clothing closet spaces by ETL/  
Intertek

Must be installed in accordance  
with NEC 410.16 for use in clothing  
closet spaces

**95+ CRI White**  
Single Bin



- 22 2150K • 95+ CRI
- 24 2350K • 95+ CRI
- 26\* 2550K • 95+ CRI
- 27 2650K • 95+ CRI
- 30 2950K • 95+ CRI
- 35 3450K • 95+ CRI
- 40 3950K • 95+ CRI



UL Class 2

IP67 Wet Location

Custom Cut to Fit,  
Field Trimmable

50,000 Hour Minimum  
Lifespan

**Colors**

- R** Red
- A** Amber
- B** Blue
- G** Green

**Static White Light Engines**

- 8000
- 4000
- 3000

Requires:  
Aion LED Driver & Approved Controller  
-Sold Separately, Not Included

Tested as suitable for use within  
clothing closet spaces by ETL/ Intertek


Must be installed in accordance with  
NEC 410.16 for use in clothing closet  
spaces



Component of a complete system including: Aion LED A-Track Light Engine, Aion LED A-Track housing with diffuser lens, & Aion LED driver (power supply). Dimmer not included. Approved dimmers, controls, power supplies, cable, & other components only. Contact Aion LED for questions regarding compatibility. Electrician installed. Strictly adhere to NEC & local building code. Limited 5-year warranty against manufacturing defects only, does not cover labor; voided by: inadequate ventilation, field modifications, installation by unqualified personnel, unapproved controls, drivers, cabling, other devices, not following installation guidelines & protocol, general negligence. Installer assumes all liability with regard to property & safety. This product is UL listed. See separate "Aion LED Warranty Terms" & additional instructional materials for more information. Authorized installers only. Systems tested prior to shipping.

# 8924-WR

## High Output

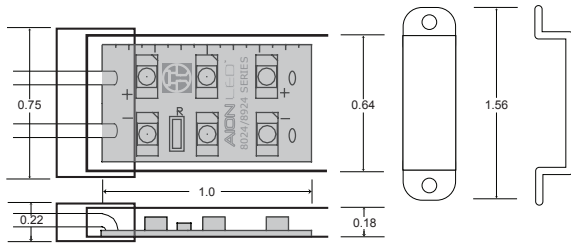

90+CRI  
 5.6W /ft.  
 ≤ 463 Lm/ft.  
 RANGE BY CCT (X-Y)


MIN. Increment: 1 in.  
 MAX. Increment: 15 ft.

	8924-22-WR	8924-24-WR	8924-26-WR	8924-27-WR	8924-30-WR	8924-35-WR	8924-40-WR
Total Lumens	334.07	388.94	374.73	391.09	415.76	438.80	446
Input Power (W)	5.48	5.65	5.47	5.27	5.29	5.36	5.56
Efficacy	61	69	68	74	79	82	80
Color Rendering Index (CRI)	94	91	97	93	93	92	
R9	69.54	52.05	82.26	66.59	69	70	
Input Voltage (VDC)	24	24	24	24	24	24	24
Input Current (AMP)	0.23	0.24	0.23	0.22	0.22	0.22	0.23
Correlated Color Temperature	2127	2268	2516	2662	2966	3388	3950



Component of a complete system including: Aion LED A-Track Light Engine, Aion LED A-Track housing with diffuser lens, & Aion LED driver (power supply). Dimmer not included. Approved dimmers, controls, power supplies, cable, & other components only. Contact Aion LED for questions regarding compatibility. Electrician installed. Strictly adhere to NEC & local building code. Limited 5-year warranty against manufacturing defects only, does not cover labor; voided by: inadequate ventilation, field modifications, installation by unqualified personnel, unapproved controls, drivers, cabling, other devices, not following installation guidelines & protocol, general negligence. Installer assumes all liability with regard to property & safety. This product is UL listed. See separate "Aion LED Warranty Terms" & additional instructional materials for more information. Authorized installers only. Systems tested prior to shipping.

**4924-WR**  
Mid Output

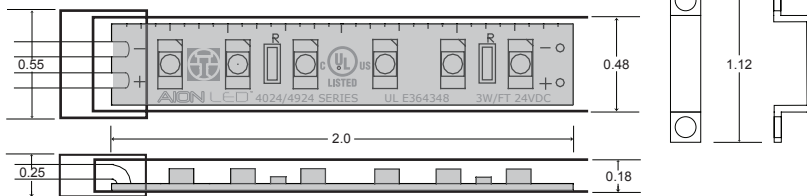

90+CRI  
2.8W /ft.  
≤ 236 Lm/ft.  
RANGE BY CCT (X-Y)


MIN. Increment: 2 in.  
MAX. Increment: 30 ft.

	4924-22-WR	4924-24-WR	4924-26-WR	4924-27-WR	4924-30-WR	4924-35-WR	4924-40-WR
TOTAL LUMENS	126.64	193.43	190.98	165.23	206.60	222.05	225.43
INPUT POWER (W)	2.26	2.82	2.83	2.19	2.61	2.65	2.81
EFFICACY	56.80	69	68	76	79	84	80
COLOR RENDERING INDEX (CRI)	94	91	97	92	92	92	
R9	71.30	52.71	83.61	66.04	68.06	69.25	
INPUT VOLTAGE (VDC)	24	24	24	24	24	24	24
INPUT CURRENT (AMP)	0.09	0.12	0.12	0.09	0.11	0.11	0.12
CORRELATED COLOR TEMPERATURE	2170	2269	2514	2657	2958	3396	3950



Component of a complete system including: Aion LED A-Track Light Engine, Aion LED A-Track housing with diffuser lens, & Aion LED driver (power supply). Dimmer not included. Approved dimmers, controls, power supplies, cable, & other components only. Contact Aion LED for questions regarding compatibility. Electrician installed. Strictly adhere to NEC & local building code. Limited 5-year warranty against manufacturing defects only, does not cover labor; voided by: inadequate ventilation, field modifications, installation by unqualified personnel, unapproved controls, drivers, cabling, other devices, not following installation guidelines & protocol, general negligence. Installer assumes all liability with regard to property & safety. This product is UL listed. See separate "Aion LED Warranty Terms" & additional instructional materials for more information. Authorized installers only. Systems tested prior to shipping.

**3924-WR**  
Standard Output

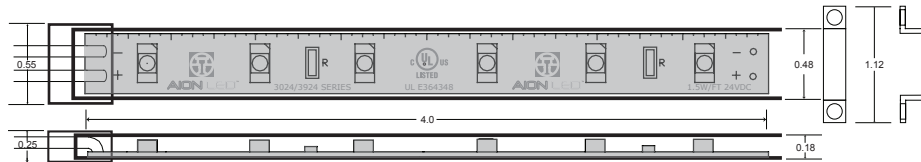

90+CRI  
1.4W /ft.  
≤ 116 Lm/ft.  
RANGE BY CCT (X-Y)  
  
MIN. Increment: 4 in.  
MAX. Increment: 32 ft.  
  
Class 2 Circuit Limitation=56'

	3924-22-WR	3924-24-WR	3924-26-WR	3924-27-WR	3924-30-WR	3924-35-WR	3924-40-WR
TOTAL LUMENS	80.84	100.17	93.77	99.38	107.50	111.24	118
INPUT POWER (W)	1.40	1.44	1.37	1.33	1.35	1.32	1.43
EFFICACY	57.71	70	69	75	80	84	82
COLOR RENDERING INDEX (CRI)	94	91	96	92	92	91	
R9	71.10	53.18	83.25	66.10	69.20	67.88	
INPUT VOLTAGE (VDC)	24	24	24	24	24	24	24
INPUT CURRENT (AMP)	0.06	0.06	0.06	0.06	0.06	0.05	0.06
CORRELATED COLOR TEMPERATURE	2180	2267	2528	2665	2957	3394	3950



Component of a complete system including: Aion LED A-Track Light Engine, Aion LED A-Track housing with diffuser lens, & Aion LED driver (power supply). Dimmer not included. Approved dimmers, controls, power supplies, cable, & other components only. Contact Aion LED for questions regarding compatibility. Electrician installed. Strictly adhere to NEC & local building code. Limited 5-year warranty against manufacturing defects only, does not cover labor; voided by: inadequate ventilation, field modifications, installation by unqualified personnel, unapproved controls, drivers, cabling, other devices, not following installation guidelines & protocol, general negligence. Installer assumes all liability with regard to property & safety. This product is UL listed. See separate "Aion LED Warranty Terms" & additional instructional materials for more information. Authorized installers only. Systems tested prior to shipping.



High Rendering Warm White  
Dynamic White



22 2150K • 95+ CRI

24 2350K • 95+ CRI

27 2650K • 95+ CRI

30 2950K • 95+ CRI



DIM TO GLOW™

UL Class 2

IP67 Wet Location

Custom Cut to Fit,  
Field Trimmable

50,000 Hour Minimum  
Lifespan

Requires:  
Aion LED Driver & Approved Controller  
-Sold Separately, Not Included

Tested as suitable for use within  
clothing closet spaces by ETL/ Intertek


Must be installed in accordance with  
NEC 410.16 for use in clothing closet  
spaces



Component of a complete system including: Aion LED A-Track Light Engine, Aion LED A-Track housing with diffuser lens, & Aion LED driver (power supply). Dimmer not included. Approved dimmers, controls, power supplies, cable, & other components only. Contact Aion LED for questions regarding compatibility. Electrician installed. Strictly adhere to NEC & local building code. Limited 5-year warranty against manufacturing defects only, does not cover labor; voided by: inadequate ventilation, field modifications, installation by unqualified personnel, unapproved controls, drivers, cabling, other devices, not following installation guidelines & protocol, general negligence. Installer assumes all liability with regard to property & safety. This product is UL listed. See separate "Aion LED Warranty Terms" & additional instructional materials for more information. Authorized installers only. Systems tested prior to shipping.

**8924-CT3022-WR**

High Rendering Warm White Wet Rated Fixture

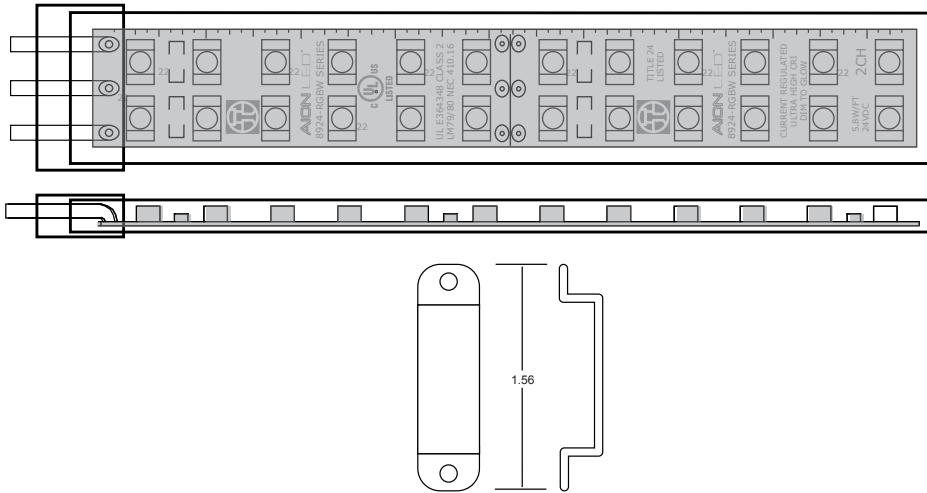

2 Channel Fixture  
 CH 1: 3000K ~2.8W/ft.  
 CH 2: 2150K ~2.8W/ft.

MIN. Increment:  
 2 in.

MAX. Increment:  
 (2x) 8ft.\*, 16ft.\*\*

PHOTOMETRICS PER CHANNEL	@2150K	@2950K
Total Lumens	126.64	206.60
Input Power (W)	2.26	2.82
Efficacy	56.80	79
Color Rendering Index (CRI)	94	92
R9	71.30	68.06
Input Voltage (VDC)	24.00	
Input Current (Amp)	0.09	0.11
Correlated Color Temperature (K)	2170	2958
Rated Lifetime	50,000 Hours	


REQUIRES D100-X2 DRIVER, DMX CONTROLLER AND 800-SERIES HOUSING -Sold Separately, Not Included

Component of a complete system including: Aion LED A-Track Light Engine, Aion LED A-Track housing with diffuser lens, & Aion LED driver (power supply). Dimmer not included. Approved dimmers, controls, power supplies, cable, & other components only. Contact Aion LED for questions regarding compatibility. Electrician installed. Strictly adhere to NEC & local building code. Limited 5-year warranty against manufacturing defects only, does not cover labor; voided by inadequate ventilation, field modifications, installation by unqualified personnel, unapproved controls, drivers, cabling, other devices, not following installation guidelines & protocol, general negligence. Installer assumes all liability with regard to property & safety. This product is UL listed. See separate "Aion LED Warranty Terms" & additional instructional materials for more information. Authorized installers only. Systems tested prior to shipping.





90+ CRI White  
Single Bin

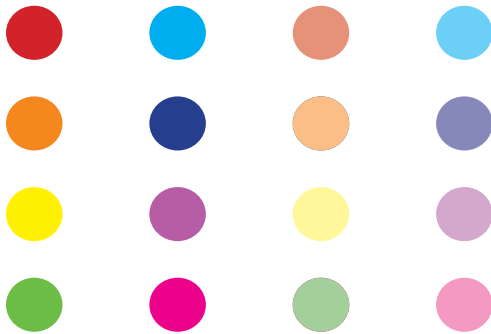

UL Class 2

IP67 Wet Location

Custom Cut to Fit,  
Field Trimmable

50,000 Hour Minimum  
Lifespan

Requires:  
Aion LED Driver & Approved Controller  
-Sold Separately, Not Included



Tested as suitable for use within  
clothing closet spaces by ETL/ Intertek

Must be installed in accordance with  
NEC 410.16 for use in clothing closet  
spaces



Component of a complete system including: Aion LED A-Track Light Engine, Aion LED A-Track housing with diffuser lens, & Aion LED driver (power supply). Dimmer not included. Approved dimmers, controls, power supplies, cable, & other components only. Contact Aion LED for questions regarding compatibility. Electrician installed. Strictly adhere to NEC & local building code. Limited 5-year warranty against manufacturing defects only, does not cover labor; voided by: inadequate ventilation, field modifications, installation by unqualified personnel, unapproved controls, drivers, cabling, other devices, not following installation guidelines & protocol, general negligence. Installer assumes all liability with regard to property & safety. This product is UL listed. See separate "Aion LED Warranty Terms" & additional instructional materials for more information. Authorized installers only. Systems tested prior to shipping.

**8924-RGBW-WR**  
Color Tuning

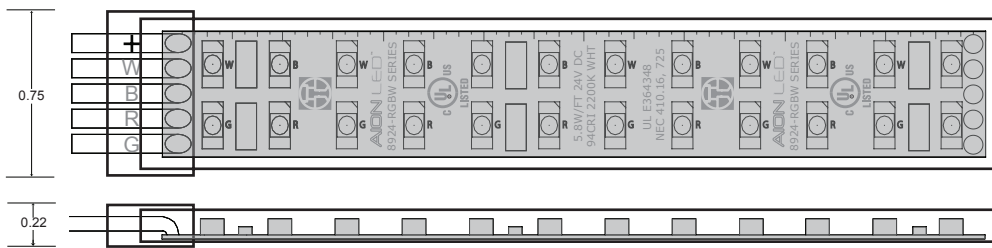

8924-RGBW-LE,  
High Output/ 4 Channel  
(Common+)

5.8W/ ft. Discrete LEDs:  
Red, Green, Blue & White

MIN. Increment:  
4 in.







MAX. Increment:  
15 ft.

REQUIRES D100-X4 DRIVER, DMX CONTROLLER AND 800-SERIES HOUSING -Sold Separately, Not Included

Component of a complete system including: Aion LED A-Track Light Engine, Aion LED A-Track housing with diffuser lens, & Aion LED driver (power supply). Dimmer not included. Approved dimmers, controls, power supplies, cable, & other components only. Contact Aion LED for questions regarding compatibility. Electrician installed. Strictly adhere to NEC & local building code. Limited 5-year warranty against manufacturing defects only, does not cover labor; voided by: inadequate ventilation, field modifications, installation by unqualified personnel, unapproved controls, drivers, cabling, other devices, not following installation guidelines & protocol, general negligence. Installer assumes all liability with regard to property & safety. This product is UL listed. See separate "Aion LED Warranty Terms" & additional instructional materials for more information. Authorized installers only. Systems tested prior to shipping.



Colors

-  Violet
-  Indigo
-  Blue
-  Green
-  Amber
-  Red



UL Class 2

IP67 Wet Location

Custom Cut to Fit,  
Field Trimmable

50,000 Hour Minimum  
Lifespan

Requires:  
Aion LED Driver & Approved Controller  
-Sold Separately, Not Included


Tested as suitable for use within  
clothing closet spaces by ETL/ Intertek

Must be installed in accordance with  
NEC 410.16 for use in clothing closet  
spaces




Component of a complete system including: Aion LED A-Track Light Engine, Aion LED A-Track housing with diffuser lens, & Aion LED driver (power supply). Dimmer not included. Approved dimmers, controls, power supplies, cable, & other components only. Contact Aion LED for questions regarding compatibility. Electrician installed. Strictly adhere to NEC & local building code. Limited 5-year warranty against manufacturing defects only, does not cover labor; voided by: inadequate ventilation, field modifications, installation by unqualified personnel, unapproved controls, drivers, cabling, other devices, not following installation guidelines & protocol, general negligence. Installer assumes all liability with regard to property & safety. This product is UL listed. See separate "Aion LED Warranty Terms" & additional instructional materials for more information. Authorized installers only. Systems tested prior to shipping.

**7024-RGB-WR**  
Mid Output Color Tuning

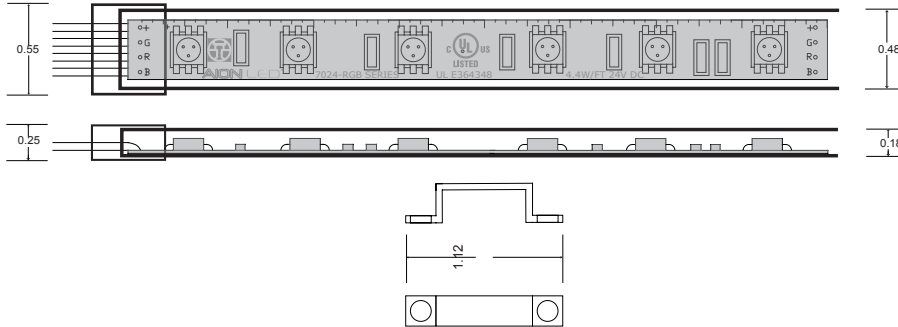

MIN. INCREMENT = 4"  
For Maximum length see individual driver pages  
4.4W/ ft. TRI-COLOR (3 IN 1) LEDs:  
RED, GREEN & BLUE

**5024-RGB-WR**  
Standard Output Color Tuning

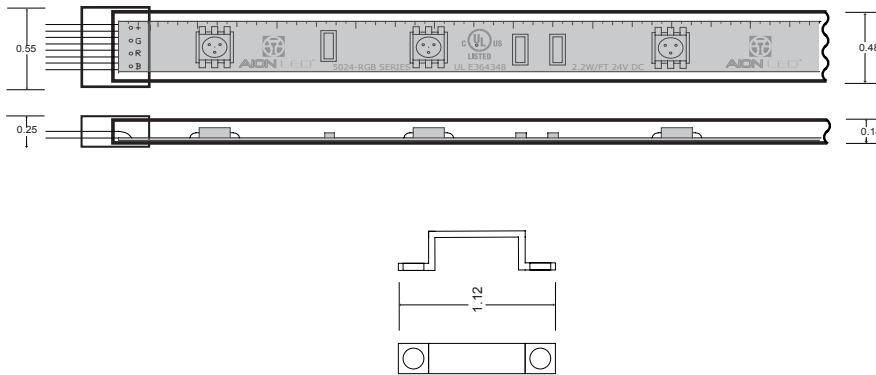

MIN. INCREMENT = 8"  
For Maximum length see individual driver pages  
2.2W/ ft. TRI-COLOR (3 IN 1) LEDs:  
RED, GREEN & BLUE



3-Channel Light Engine

UL Class 2

IP20 Dry Location

Custom Cut to Fit

Input Voltage: 24VDC

50,000 Hour Minimum Lifespan

Requires:  
Aion LED D100-X3 Driver  
Aion LED AX5-3 DMX Controller, DTM  
ART 4 or approved 3rd party controller  
AND Aion LED AT Series Housing  
- Sold Separately, Not Included

