

90+ CRI White  
Single Bin



- 22** 2150K • 94 CRI
- 24** 2350K • 91 CRI
- 26** 2550K • 97 CRI
- 27** 2650K • 92 CRI
- 30** 2950K • 92 CRI
- 35** 3450K • 92 CRI
- 40** 3950K • 90+ CRI

UL Class 2

IP20 Dry Location

Custom Cut to Fit

50,000 Hour Minimum  
Lifespan

Colors

- R** Red
- A** Amber
- B** Blue
- G** Green

80+ CRI Available Via Special Order

Requires: Aion LED Driver, Approved Controller, AT, WT or ST Series Housing -Sold Separately, Not Included


Tested as suitable for use within clothing closet spaces by ETL/ Intertek

Must be installed in accordance with NEC 410.16 for use in clothing closet spaces



Component of a complete system including: Aion LED A-Track Light Engine, Aion LED A-Track housing with diffuser lens, & Aion LED driver (power supply). Dimmer not included. Approved dimmers, controls, power supplies, cable, & other components only. Contact Aion LED for questions regarding compatibility. Electrician installed. Strictly adhere to NEC & local building code. Limited 5-year warranty against manufacturing defects only, does not cover labor; voided by: inadequate ventilation, field modifications, installation by unqualified personnel, unapproved controls, drivers, cabling, other devices, not following installation guidelines & protocol, general negligence. Installer assumes all liability with regard to property & safety. This product is UL listed. See separate "Aion LED Warranty Terms" & additional instructional materials for more information. Authorized installers only. Systems tested prior to shipping.

4924-LE  
Mid Output

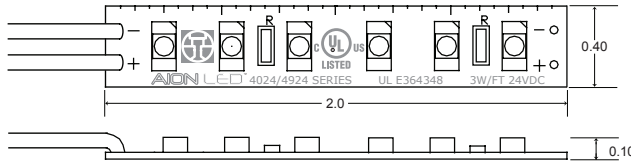

90+CRI  
2.8W /ft.  
≤ 236 Lm/ft.  
RANGE BY CCT (X-Y)

MIN. Increment: 2 in.  
MAX. Increment: 30 ft.

	4924-22-LE	4924-24-LE	4924-26-LE	4924-27-LE	4924-30-LE	4924-35-LE	4924-40-LE
TOTAL LUMENS	126.64	193.43	190.98	165.23	206.60	222.05	225.43
INPUT POWER (W)	2.26	2.82	2.83	2.19	2.61	2.65	2.81
EFFICACY	56.80	69	68	76	79	84	80
COLOR RENDERING INDEX (CRI)	94	91	97	92	92	92	
R9	71.30	52.71	83.61	66.04	68.06	69.25	
INPUT VOLTAGE (VDC)	24	24	24	24	24	24	24
INPUT CURRENT (AMP)	0.09	0.12	0.12	0.09	0.11	0.11	0.12
CORRELATED COLOR TEMPERATURE	2150K	2400K	2550K	2700K	2950K	3450K	3950K



Component of a complete system including: Aion LED A-Track Light Engine, Aion LED A-Track housing with diffuser lens, & Aion LED driver (power supply). Dimmer not included. Approved dimmers, controls, power supplies, cable, & other components only. Contact Aion LED for questions regarding compatibility. Electrician installed. Strictly adhere to NEC & local building code. Limited 5-year warranty against manufacturing defects only, does not cover labor; voided by: inadequate ventilation, field modifications, installation by unqualified personnel, unapproved controls, drivers, cabling, other devices, not following installation guidelines & protocol, general negligence. Installer assumes all liability with regard to property & safety. This product is UL listed. See separate "Aion LED Warranty Terms" & additional instructional materials for more information. Authorized installers only. Systems tested prior to shipping.