


8924-CT3022-LE

Standard Output Dynamic White Light Engine

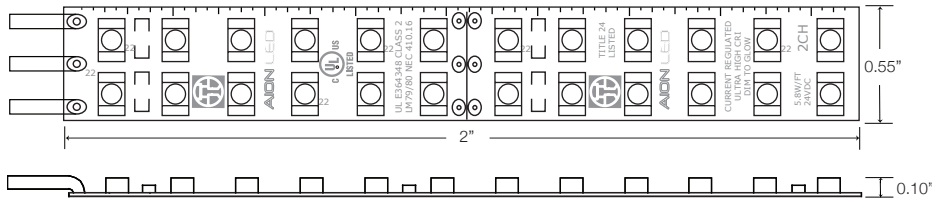

2 Channel Fixture:

- CH 1: 3000K ~2.8W/ft.
- CH 2: 2150K ~2.8W/ft.

Maximum Increment:

- 15ft.
- or-
- 30 ft. when utilizing Aion LED Dynamic Tuner Module

Min. Increment:

2 in.

	@2150K	@2950K
Total Lumens	126.64	206.60
Input Power	2.26 W	2.82 W
Efficacy	56.80	79
Color Rendering Index	94+ CRI	92+ CRI
R9	71.30	68.06
Input Voltage (VDC)	24.00	24.00
Input Current (Amp)	0.09	0.11
Correlated Color Temperature	2150K	2950K



REQUIRES D100-X2 DRIVER, DMX CONTROLLER AND 800-SERIES HOUSING Sold Separately, Not Included

Component of a complete system including: Aion LED A-Track Light Engine, Aion LED A-Track housing with diffuser lens, & Aion LED driver (power supply). Dimmer not included. Approved dimmers, controls, power supplies, cable, & other components only. Contact Aion LED for questions regarding compatibility. Electrician installed. Strictly adhere to NEC & local building code. Limited 5-year warranty against manufacturing defects only, does not cover labor; voided by: inadequate ventilation, field modifications, installation by unqualified personnel, unapproved controls, drivers, cabling, other devices, not following installation guidelines & protocol, general negligence. Installer assumes all liability with regard to property & safety. This product is UL listed. See separate "Aion LED Warranty Terms" & additional instructional materials for more information. Authorized installers only. Systems tested prior to shipping.