

95+ CRI White
Single Bin

Available only in
9000 Series



- 22** 2150K • 95+ CRI **55** 5500K • 85+ CRI
- 24** 2350K • 95+ CRI
- 26*** 2550K • 95+ CRI
- 27** 2650K • 95+ CRI
- 30** 2950K • 95+ CRI
- 35** 3450K • 95+ CRI
- 40** 3950K • 95+ CRI

Colors

- R** Red
- A** Amber
- B** Blue
- G** Green

UL Class 2

IP20 Dry Location

Custom Cut to Fit

50,000 Hour Minimum
Lifespan

Aion LED Light Engines

- 9524-FR
- 8924-LE
- 6524-LE
- 4924-LE
- 3924-LE

*2550 Only Available in 8000, 4000 & 3000 LE Type | 80+ CRI Available Via Special Order


Requires: Aion LED Driver, Approved Controller, AT, WT or ST Series Housing -Sold Separately, Not Included

Tested as suitable for use within clothing closet spaces by ETL/ Intertek

Must be installed in accordance with NEC 410.16 for use in clothing closet spaces



Component of a complete system including: Aion LED A-Track Light Engine, Aion LED A-Track housing with diffuser lens, & Aion LED driver (power supply). Dimmer not included. Approved dimmers, controls, power supplies, cable, & other components only. Contact Aion LED for questions regarding compatibility. Electrician installed. Strictly adhere to NEC & local building code. Limited 5-year warranty against manufacturing defects only, does not cover labor; voided by: inadequate ventilation, field modifications, installation by unqualified personnel, unapproved controls, drivers, cabling, other devices, not following installation guidelines & protocol, general negligence. Installer assumes all liability with regard to property & safety. This product is UL listed. See separate "Aion LED Warranty Terms" & additional instructional materials for more information. Authorized installers only. Systems tested prior to shipping.


PRELIMINARY SPECIFICATION, SUBJECT TO CHANGE WITHOUT NOTICE

9000-FR
 $\leq 1,100 \text{ Lm/ft.}^*$

95+ CRI

12W /ft.*

Max run: 8 ft. /Class 2 4A circuit (96W)

Min: 4 in.

PRELIMINARY SPECIFICATION, SUBJECT TO CHANGE WITHOUT NOTICE

6000 Series


600 Lm/ft.

95+ CRI

7W /ft.

Max run: 12 ft. /Class 2 4A circuit (96W)

Min: 3 in.


8000 Series
 $\leq 463 \text{ Lm/ft.}$

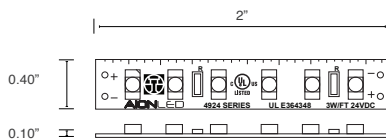
90+CRI

5.6W /ft.

RANGE BY CCT (X-Y)

MIN: 1 in. | MAX: 15 ft.

Available per 1" increment


4000 Series
 $\leq 236 \text{ Lm/ft.}$

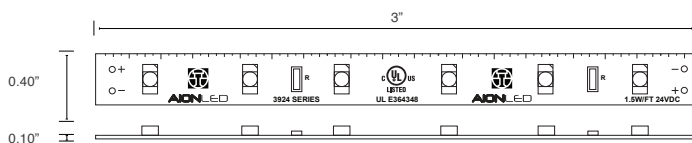
90+CRI

2.8W /ft.

RANGE BY CCT (X-Y)

MIN: 2 in. | MAX: 30 ft.

Available per 2" increment


3000 Series
 $\leq 116 \text{ Lm/ft.}$

90+CRI

1.4W /ft.

RANGE BY CCT (X-Y)

MIN: 4 in. | MAX: 32 ft.

Available per 1" increment

Class 2 Circuit Limitation=56'

Component of a complete system including: Aion LED A-Track Light Engine, Aion LED A-Track housing with diffuser lens, & Aion LED driver (power supply). Dimmer not included. Approved dimmers, controls, power supplies, cable, & other components only. Contact Aion LED for questions regarding compatibility. Electrician installed. Strictly adhere to NEC & local building code. Limited 5-year warranty against manufacturing defects only, does not cover labor; voided by: inadequate ventilation, field modifications, installation by unqualified personnel, unapproved controls, drivers, cabling, other devices, not following installation guidelines & protocol, general negligence. Installer assumes all liability with regard to property & safety. This product is UL listed. See separate "Aion LED Warranty Terms" & additional instructional materials for more information. Authorized installers only. Systems tested prior to shipping.